

CPA-P-808



- hydrostatic level transmitter
- detachable probe, diameter 35 mm
- nominal pressure: from 0...1 mH₂O up to 0...100 mH₂O
- output signals: 2-wire: 4...20 mA; 3-wire: 0...20 mA / 0...10 V
- stainless steel sensor
- plastic probe
- accuracy 0.25 % / 0.35 % span
- small thermal effect, excellent linearity
- optional: different kinds of cables and seals

The detachable plastic probe **CPA-P-808** is designed for level measurement of water, waste water as well as fuels and oils. Basic element is a piezoresistive stainless steel sensor.

In order to facilitate stock-keeping and maintenance the transmitter head is plugged to the cable assembly with a connector and can be changed easily.

PREFERRED AREAS OF USE ARE



Water / filtrated sewage
ground water level measurement
storm water systems
drinking water system
water treatment plants



Fuel / Oil
fuel storage
tank farm
biogas plants
process water recycling

TECHNICAL DATA

Input pressure range												
Nominal pressure gauge	[bar]	0.1	0.16	0.25	0.4	0.6	1	1.6	2.5	4	6	10
Level	[mH ₂ O]	1	1.6	2.5	4	6	10	16	25	40	60	100
Overpressure	[bar]	0.5	1	1	2	5	5	10	10	20	40	40
Burst pressure	[bar]	1.5	1.5	1.5	3	7.5	7.5	15	15	25	50	50
max. ambient pressure (housing)		20 bar										

Output signal / Supply	
Standard	2-wire: 4 ... 20 mA / V _S = 8 ... 32 V _{DC}
Options	3-wire: 0 ... 20 mA / V _S = 14 ... 30 V _{DC} 0 ... 10 V / V _S = 14 ... 30 V _{DC}

Performance	
Accuracy	standard: nominal pressure < 0.4 bar: ± 0.5 % span nominal pressure 0.4 bar: ± 0.35 % span option 1: nominal pressure 0.4 bar: ± 0.25 % span
Permissible load	current 2-wire: R _{max} = [(V _S - V _S min) / 0.02 A] W current 3-wire: R _{max} = 500 W voltage 3-wire: R _{min} = 10 kW
Influence effects	supply: 0.05 % span / 10 V load: 0.05 % span / kW
Long term stability	± 0.1 % span / year
Response time	< 10 msec

¹ accuracy according to EN IEC 62828-2 – limit point adjustment (non-linearity, hysteresis, repeatability)

Thermal effects (Offset and Span)		
Nominal pressure P _N	[bar]	< 0.40 0.40
Tolerance band	[% span]	± 1 ± 0.75
in compensated range	[°C]	0 ... 50

Permissible temperatures	
Permissible temperatures	Medium/ electronics/ environment/ storage: -20 ... 80 °C *
*If the cable is intended for use in a smaller temperature range, the use of the probe is limited by this range.	

Electrical protection ²	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Lightning protection	2-wire: integrated 3-wire: without
Electromagnetic compatibility	emission and immunity according to EN 61326

² additional external overvoltage protection unit in terminal box KL 1 or KL 2 with atmospheric pressure reference available on request

Electrical connection			
Cable with sheath material ³	PVC (-5 ... 70 °C) grey (-25 ... 70 °C in fixed condition)	Ø 7,4 mm	
	PUR (-25 ... 80 °C) black (with drinking water certificate)	Ø 7,4 mm	
	FEP ⁴ (-25 ... 75 °C) black	Ø 7,4 mm	
Cable capacitance	signal line/shield also signal line/signal line: 160 pF/m		
Cable inductance	signal line/shield also signal line/signal line: 1 µH/m		
Bending radius	static installation: 10-fold cable diameter, dynamic application: 20-fold cable diameter		
³ shielded cable with integrated air tube for atmospheric pressure reference			
⁴ do not use freely suspended probes with an FEP cable if effects due to highly charging processes are expected			
Materials (media wetted)			
Housing	PP-H		
Seals	FKM EPDM		
Diaphragm	stainless steel 1.4435 (316L)		
Cable sheath	PVC, PUR, FEP, others on request		
Protection cap	POM-C		
Miscellaneous			
Option cable protection (on request)	prepared for mounting with PP-HT pipe Ø 25 mm; available as compact product (standard: pipe with a total length up to 2 m possible)		
Current consumption	signal output current: max. 25 mA signal output voltage: max. 7 mA		
Weight	approx. 400 g (without cable)		
Ingress protection	IP 68		
CE-conformity	EMC Directive: 2014/30/EU		


ELECTRICAL CONNECTION

Wiring diagrams		
2-wire-system (current)	3-wire-system (current / voltage)	M12x1 (4-pin)
Pin configuration		
Electrical connection	Binder serie 723 ⁶ (4-pin)	cable colours (DIN 47100)
Supply +	3	wh (white)
Supply -	4	bn (brown)
Signal + (only 3-wire)	1	gn (green)
Shield	2	gn/ye (green / yellow)
⁶ in detached version		




DIMENSION DRAWINGS

standard

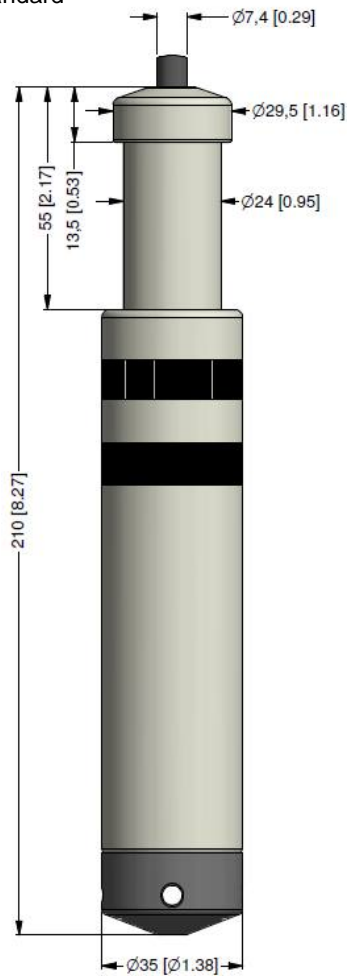


option

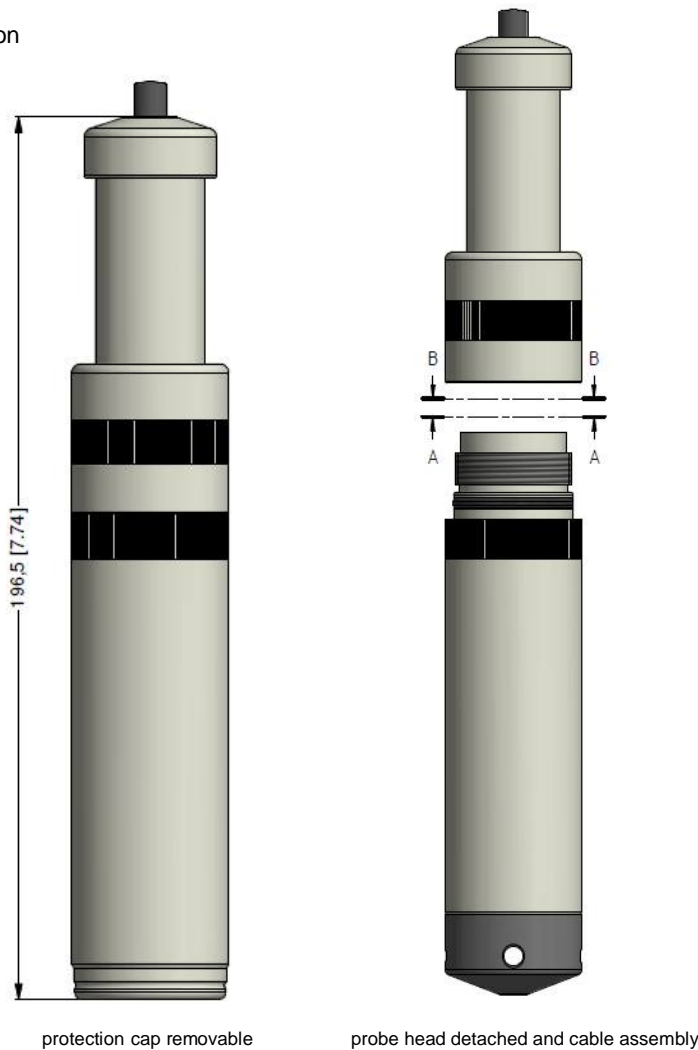

ACCESSORIES

Mounting flange with cable gland		
Technical data		
Suitable for	all probes	
Flange material	stainless steel 1.4404 (316L)	
Material of cable gland	standard: brass, nickel plated on request: stainless steel 1.4305 (303); plastic	
Seal insert	material: TPE (ingress protection IP 68)	
Hole pattern	according to DIN 2507	
Version	Size (in mm)	Weight
DN25 / PN40	D = 115, k = 85, b = 18, n = 4, d = 14	1.4 kg
DN50 / PN40	D = 165, k = 125, b = 20, n = 4, d = 18	3.2 kg
DN80 / PN16	D = 200, k = 160, b = 20, n = 8, d = 18	4.8 kg
Ordering type		Ordering code
DN25 / PN40 with cable gland brass, nickel plated		ZMF2540
DN50 / PN40 with cable gland brass, nickel plated		ZMF5040
DN80 / PN16 with cable gland brass, nickel plated		ZMF8016
Cable clamp		
Technical Data		
Suitable for	all probes with cable 5.5 ... 10.5 mm	
Material	standard: steel, zinc plated optionally: stainless steel 1.4301 (304)	
Weight	approx. 160 g	
Ordering type		Ordering code
Terminal clamp, of steel, zinc plated		1003440
Terminal clamp, of stainless steel 1.4301 (304)		1000278

cable gland M16x1.5 with seal insert (for cable- 4 ... 11 mm)

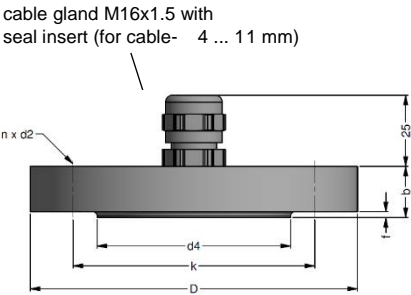

ORDER CODE

CPA-P-808-[] [] - [] [] [] - [] - [] - [] - [] - [] - [] - [] [] [] - [] []

[illegible]

- 1 - cable with integrated ventilation tube for atmospheric pressure reference
- 2 - pipe is not part of the supply
- 3 - maximum length of PVC cable - 25 m, PUR, FEP, TPE - 40 m

Manufacturer reserves the right to change sensor specifications without further notice.