

Stainless Steel, Multi-Column Compression Load Cell

FEATURES

- Capacity ranges of 25,000 to 200,000 pounds, 10 to 100 metric tonnes
- Stainless steel, welded seal construction
- Single piece multi-column design
- 3 times more side load capacity than other designs
- Integral conduit adaptor
- 35 feet (10.7m) standard cable length
- Trade certified for NTEP Class III:5000d, IIIL:10000d and OIML R-60 3000d
- Welded *Sensorgage*™ sealed to IP67 standards



APPLICATIONS

- Truck scales
- Railroad track scales
- Tank, bin and hopper weighing

DESCRIPTION

The Model 65088 is a high capacity, low profile, stainless steel compression load cell.


The unique four column design offers excellent insensitivity to eccentric loads. This design is one of the most successful compression cells ever produced and

is suitable for use in truck scales, rail scales and high capacity silo weighing applications.

This product's stainless steel construction, welded seals and IP67 rating ensures ultimate survivability under harsh conditions.

This load cell is certified for Legal For Trade applications by both American NTEP and International OIML standards.

OUTLINE DIMENSIONS in inches (millimeters)

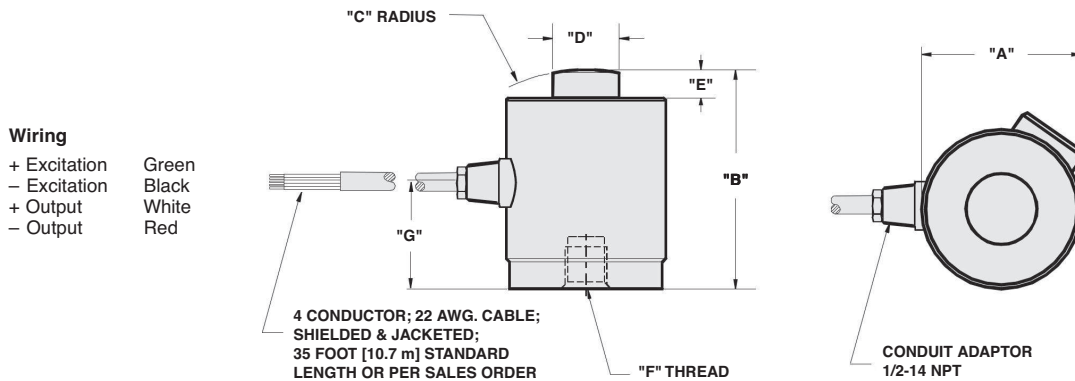

CAPACITY	A	B	C	D	E	F	G
25k, 50k	3.00	3.25	6.00	1.25	0.40	1/2-20 UNF - 2B x .31 Deep	1.68
100k	4.00	5.00	6.00	2.31	0.51	3/4-16 UNF - 2B x .56 Deep	2.49
200k	6.00	7.25	17.00	3.13	1.04	3/4-16 UNF - 2B x .75 Deep	3.28
(10 t, 25 t)	(76.2)	(82.6)	(152.4)	(31.7)	(10.2)	(M12 x 1.75 - 6H x 8 Deep)	(42.7)
(40 t, 50 t)	(101.6)	(127.0)	(152.4)	(58.7)	(13.0)	(M20 x 2.5 - 6H x 14 Deep)	(63.2)
(100 t)	(152.4)	(184.2)	(431.8)	(79.5)	(26.4)	(M20 x 2.5 - 6H x 19 Deep)	(83.3)

Capacities are in pounds (kg/t).

Stainless Steel, Multi-Column Compression Load Cell

SPECIFICATIONS					
PARAMETER	VALUE				UNIT
Rated capacity—R.C. (E _{max})	25k, 50k, 100k, 200k 10 t, 25 t, 40 t, 50 t, 100 t				lbs t
NTEP/OIML accuracy class	NTEP III	NTEP IIIL	Standard	OIML R60	
Maximum no. of intervals (n)	5000 multiple	10000 multiple		3000	
Y = E _{max} /V _{min}	NTEP Cert. No. 95-134				Maximum available
Rated output—R.O.	2				mV/V
Rated output tolerance	0.25				±% mV/V
Zero balance	≤1.0				±% FSO
Combined error	0.02	0.02	0.03	0.02	±% FSO
Non-repeatability	0.01				±% FSO
Creep error (20 minutes)	0.025	0.03	0.03	0.017	±% FSO
Temperature effect on zero	0.0010	0.0010	0.0015	0.0010	±% FSO
Temperature effect on output	0.0008	0.0008	0.0008	0.0007	±% FSO/°F
Compensated temperature range	14 to 104 (–10 to 40)				°F (°C)
Operating temperature range	0 to 150 (–18 to 65)				°F (°C)
Storage temperature range	–60 to 185 (–50 to 85)				°F (°C)
Safe sideload	30				% of R.C.
Maximum safe central overload	150				% of R.C.
Ultimate central overload	400				% of R.C.
Excitation, recommended	5–20				VDC or VAC RMS
Excitation, maximum	25				VDC or VAC RMS
Input impedance	445.5–454.5				Ω
Output impedance	475.2–484.8				Ω
Insulation resistance at 50 VDC	>1000				MΩ
Material	Stainless steel				
Environmental protection	IP67				

FSO— Full Scale Output

R.C. — Rated Capacity

All specifications subject to change without notice.

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase.

To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.