

CPK-HF-24



- high-frequency limit level sensors
- for reliable limit level sensing of various liquids, slurries and pastes
- resistant to adhesion of viscous and adhering media (ketchups, yoghurts, spreads, syrups, creams, pastes, cleaning agents, etc.)
- replacement for vibrating level sensors
- adjustment with magnetic pen or programming wire
- universal design for all types of media (electrically conductive and non-conductive)
- high stability at high sensitivity
- the unique design of the electrode system does not require an additional internal seal (O-ring)



The **CPK-HF-24** high-frequency level sensor is designed for industrial use in limit sensing of liquid and pasty media. It can serve as direct replacement for a vibrating level sensor, or a capacitive level sensor for more demanding applications. Media can be electrically conductive or non-conductive with any permittivity. It can be installed in metal or plastic tanks, filling tanks, sumps, etc.



The sensor is available with a standard (type 1) or extended (type 11) electrode section in combination with a plastic (CP) or stainless steel (CM) connector.

VARIANTS OF LEVEL SENSORS

CPK-HF-24N-1-...-CP	insulated electrode (PEEK), for sensing various liquids, slurries and pastes, also suitable for oils. Plastic connector with LED indication allows adjustment even with a magnetic pen and visual check of sensor functionality
CPK-HF-24N-11-...-CP	insulated electrode (PEEK) extended electrode, for sensing various liquids, slurries and pastes, also suitable for oils. Plastic connector with LED indication allows adjustment even with a magnetic pen and visual check of sensor functionality.
CPK-HF-24N-1-...-CM	insulated electrode (PEEK), for sensing various liquids, slurries and pastes, also suitable for acids or bases. Hardened stainless steel version of the connector (without LED indication) is designed for more demanding conditions, setting with a programming cable is recommended.
CPK-HF-24N-11-...-CM	insulated electrode (PEEK) extended electrode part, for sensing various liquids, slurries and pastes, also suitable for acids or bases. Hardened stainless steel version of the connector (without LED indication) is designed for more demanding conditions, setting with programming wire is recommended.



DIMENSION DRAWINGS

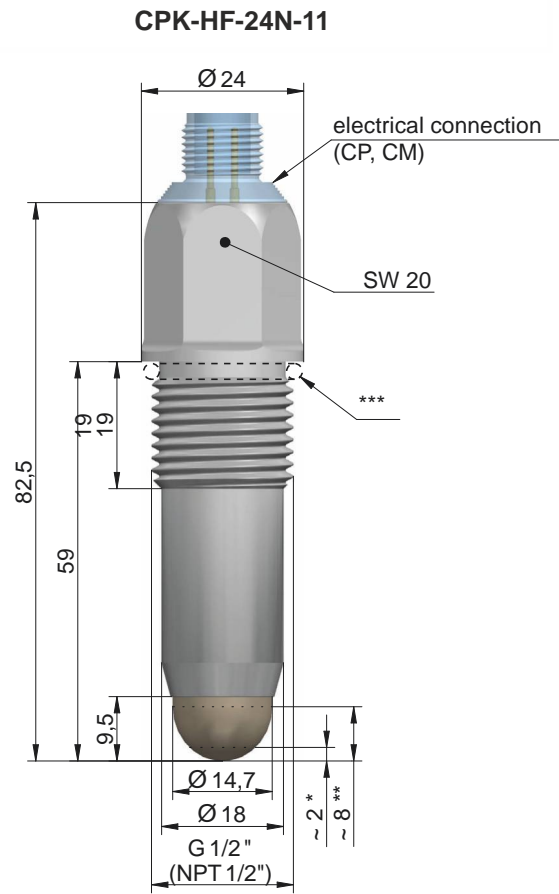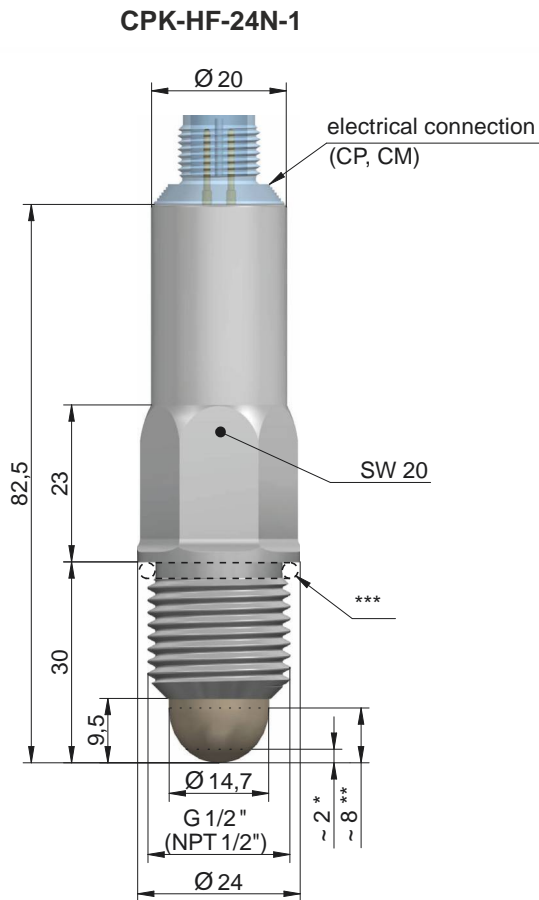

* Typical switching point position for water (factory setting)
** Typical switching point position for oil (factory setting)
*** Supplied without gasket as standard

Technical specifications	
Supply voltage	7 ... 34 V DC
Current consumption	max. 5 mA DC
Output type	PNP (open collector)
Max. switching current (PNP output)	300 mA
Process temperature range at the process connection point	-40 ... +105 °C
Maximum overpressure (relative)	-40 ... +75 °C +75 °C ... +105 °C
Process connection	thread G ½, NPT ½
Electrical connection	connector M12
Protection class	IP 68
Weight (without cable)	approx. 0.15 kg


Materials	
part of the sensor	standard material *
Housing (case)	stainless steel W. Nr. 1.4404 (AISI 316L)
Electrode coating	PEEK
Connector M12 - CP	polycarbonate
Connector M12 - CM	stainless steel W. Nr. 1.4404 (AISI 316L)




INSTALLATION AND RECOMMENDATIONS

CPK-HF-24 level sensor can be mounted horizontally or diagonally in a vessel, tank or pipe shell by screwing into a sleeve or by attaching with a nut. Basic application recommendations are listed below.


Thanks to its design, the sensor is suitable for level detection of viscous and electrically conductive media (yoghurt, marmalades, mayonnaise, spreads, liquid soaps, creams or pastes). After setting the sensitivity to the medium, the sensor reacts reliably to the presence or absence of the medium level. Conversely, the sensor does not react to residues and deposits of viscous media on the measuring electrode.



X = Recommended orientation for installation of sensors in pipes





Correct orientation of sensor installation in tanks

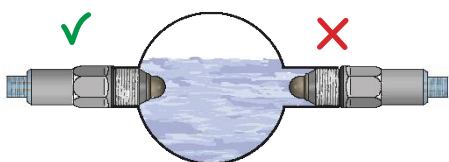

Correct and incorrect installation of the sensor into the pipe fitting



ELECTRICAL CONNECTION

CPK-HF-24N-...-CP

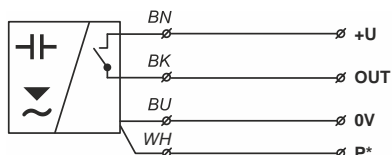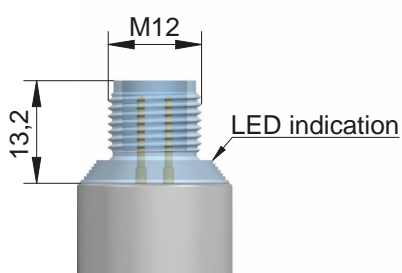

*Wiring of CPK-HF-24 sensor with PNP Output
* Programming wire*









CPK-HF-24N-...-CM



Legend:
BK - black (OUT)
BN - brown (+U)
BU - blue (0V)
WH - white (P)

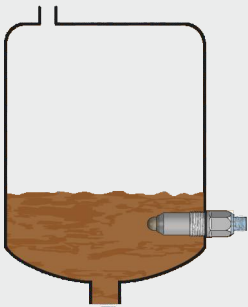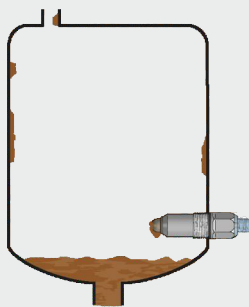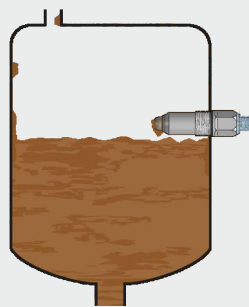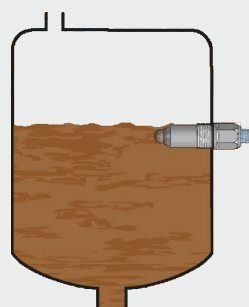SETTING MODES

The sensor can be set to normally closed "O-mode" or to normally open "C-mode" switch types.

minimum level - mode O		maximum level - mode C	
			
closed	open	closed	open
			
illuminated*	not illuminated*	illuminated*	not illuminated*

For safety reasons, we recommend using the „O“ mode setting for sensing the minimum level (the sensor switches on when flooded). A failure of the sensor or wiring will be indicated here as an emergency level condition by disconnecting the sensor.

By analogy, for max. level, we recommend setting the mode „C“ (the sensor switches on when flooded).

*LED indication only for CP variant, not valid for CM

SETTING AND DISPLAY ELEMENTS

Setting elements

Used to adjust the sensitivity and behaviour of the sensor.

1) Locally using a magnetic pen (CP variant)

which is attached to the magnetically sensitive ON or OFF spots on the sensor.

2) Remotely by programming wire (CP and CM variant)

via the dedicated power supply unit. Remote parameterization allows the same setting options as the magnetic pen setting.

Display elements (CP variant)

Used to display the sensor status.

1) Green LED

flashing - (approx. 0.4 sec.) - correct level detection function

not illuminated - incorrect installation or malfunction

2) Orange LED


illuminated - the sensor is closed

not illuminated - the sensor is open

3 short flashes - confirmation of setting

alternating flashing of green and orange LEDs - setting error

simultaneous illumination of green and orange LEDs - during the application of the magnetic pen when the setting is confirmed

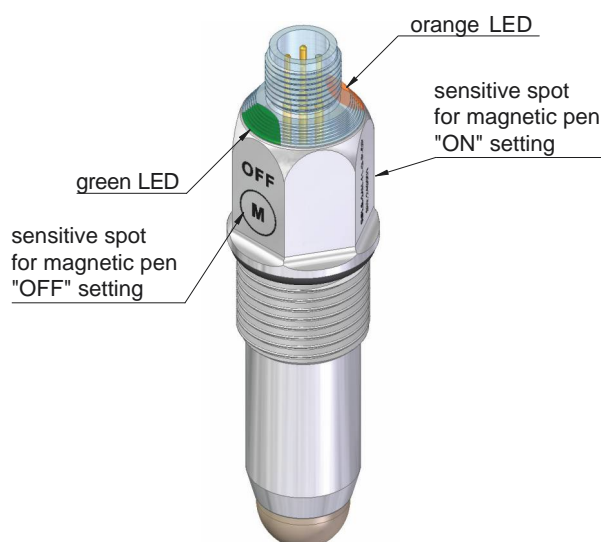

ORDER CODE

CPK-HF-24N---P-

type of electrode:
1 : coated electrode (PEEK)
11 : coated electrode (PEEK), extended electrode section

process connection*:
G : front installation, thread G 1/2
NPT : front installation, 1/2 NPT

* Supplied without gasket as standard

electrical connection:
CP : standard plastic connector, thread M12 (LED indication)
CM : standard stainless steel connector, thread M12 (hardened variant)

CORRECT SPECIFICATION EXAMPLES

CPK-HF-24N-11-G-P-CM

(11) coated electrode (PEEK, extended electrode section); (G) front installation, thread G 1/2;
(P) PNP (open collector) output; (CM) stainless steel M12 connector.

ACCESSORIES

magnetic pen (1 pc) (CP variant only)	included in the price		
disassemble socket	at extra cost	ELKA 4012	
disassemble socket	at extra cost	ELWIKA 4012	
cable with ELWIKA connector three-core without programming wire option	at extra cost	KV 4312	
cable with ELWIKA connector four-core with programming wire option	at extra cost	KV 4412	
di erent types of seals: o-rings (EPDM, FPM, NBR) USIT rings (FPM, NBR) aluminium seals	at extra cost		
weld flange G 1/2	at extra cost		
fixing nut G 1/2	at extra cost		
Recommended power supply and display unit power supply of sensors, converting their status to power contact and remote parameterization	at extra cost		

