



SFX-800

- electromagnetic flow meter
- 0.5% F.S measuring accuracy
- RS-485 Modbus communication, 4-20 mA output
- measuring the flow of fluid in the forward and reverse directions
- unaffected by the temperature, pressure, density of the liquid
- no pressure loss
- readings that are unaffected by changes in density or viscosity

The electromagnetic flow meter SimFlux SFX-800 is designed based on the Faraday electromagnetic induction principle and are used to directly measure the flow rate of conductive liquids in closed pipelines. During on-site monitoring and display, standard current signals, pulse signals, and RS-485 digital signals can be output for recording, adjustment, and control, achieving automatic detection and control. It can be widely used in industries such as tap water, chemical industry, coal, environmental protection, light textile, metallurgy, paper making, etc.

APPLICATIONS

- Tap water
- Chemical industry
- Coal
- Environmental protection
- Light textile
- Reservoirs

OPERATING PRINCIPLE

The operating principle of electromagnetic flowmeter is based on Faraday's law of electromagnetic induction. The two electromagnetic coils at the upper and lower ends as shown in Figure 1 generate a constant or alternating magnetic field. When the conductive medium flows through the electromagnetic flowmeter, the induced electromotive force can be detected between the left and right electrodes on the wall of the flowmeter tube. The magnitude of the induced electromotive force is proportional to the electrically conductive medium flow rate, the magnetic induction density of the magnetic field, and the width of the conductor (the inner diameter of the flowmeter measuring tube), and the flow rate of the medium can be obtained by calculation. The induced electromotive force equation is as follows:

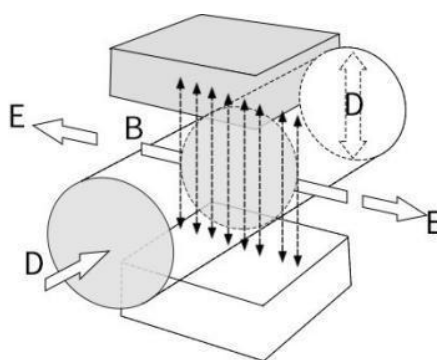


Fig. 1

$$E = K \times B \times V \times D$$

where:

- E - induced electromotive force
- K - meter constant
- B - magnetic induction density
- V - average flow speed in cross-section of measuring tube
- D - inner diameter of measuring tube


When measuring the flow, the fluid flows through a magnetic field which is perpendicular to the flow direction. The flow of conductive fluid induces a potential proportional to the average flow velocity, thus requiring the conductivity of the measured flowing liquid to be higher than the minimum conductivity. The induced voltage signal is detected by two electrodes and transmitted to the converter via a cable. After a series of analog and digital signal processing, the accumulated flow and real-time flow are displayed on the display of the converter.

TECHNICAL DATA

Input			
Measured variable	direct measured variables: flow velocity calculated measured variables: volume flow, mass flow		
Velocity of flow	typically velocity of flow: 0.5 m/s - 5 m/s		
Nominal diameter	DN10 - DN1000		
Flow range	Nominal diameter	Min value (m³/h)	Max value (m³/h)
	DN10	0.14	1.4
	DN15	0.32	3.2
	DN20	0.56	5.6
	DN25	0.88	8.8
	DN32	1.4	14
	DN40	2.3	23
	DN50	3.5	35
	DN65	6	60
	DN80	9	90
	DN100	14	140
	DN125	22	220
	DN150	32	320
	DN200	56	560
	DN250	88	880
	DN300	127	1270
	DN350	173	1730
	DN400	226	2260
	DN450	286	2860
	DN500	353	3530
	DN600	509	5090
	DN700	693	6930
	DN800	905	9050
	DN900	1150	11500
	DN1000	1410	14100
Range ratio	1:10		

Output	
Current output	function: measurement of volume and quality (in the case of constant density) setting: scope 4-20 mA (max 20 mA, min 4 mA) internal voltage: 24V DC loading: $\leq 750 \Omega$
Pulse output	basis: $F_{max} \leq 5000$ cp/s output pulse width: 0.1 - 2000 ms (this value is lower than the maximum duty cycle, with a maximum duty cycle of 1:1) pulse coefficient: 0.001 - 100000 /unit passive: $U_{Outer} \leq 30V$ DC active: $U_{Internal} \leq 24V$ DC; $I \leq 4.52$ mA
Communications	RS-485 serial / Modbus RTU, Hart communication protocol (optional)
Relay (remote type optional)	2 channels SPST, 250VAC/3A

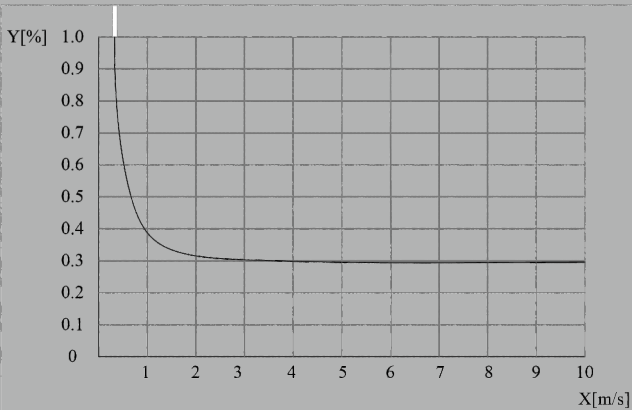


Power supply	
Supply voltage	100V AC - 240V AC; 50/60Hz 20V DC - 28V DC
Power consumption	≤ 15 W
Performance characteristics	
Reference operating conditions	medium: water temperature: 20°C pressure: 0.1 MPa installation requirements: inlet run ≥ 10DN, outlet run ≥ 5DN
Accuracy	measurement value ± 0.5% (flow velocity 0.5 m/s - 5 m/s)
Repetitiveness	0.16%
Maximum measured error	 X[m/s]: velocity of flow Y[%]: actual measured value deviation
Process	
Medium temperature range	chloroprene rubber (CR): -10°C - +70°C polyurethane rubber (PU): -10°C - +60°C PTFE/FEP: -10°C - +120°C
Pressure rating (high pressure can be customized)	DN10 - DN250: PN < 1.6 MPa DN300 - DN1000: PN < 1.0 MPa note: if there are differences in the selection of individual specifications, the label shall prevail, and high-voltage can be customized)
Conductivity	≥ 50 μS/cm
Buried depth	not deeper than 5 meters (only for remote type sensors with IP 68 protection)
Immersion depth	not deeper than 3 meters (only for remote type sensors with IP 68 protection)
Terminals	screw type terminal block, maximum wire diameter 2.5 mm ²
Cable entries	M20x1.5 cable gland
Signal cable	apply only to remote type
Environment	
Ambient temperature	integrated type: -10°C - +55°C remote type: -20°C - +60°C
Storage temperature	-20°C - +55°C
Ingress protection	integrated type: standard IP 65; high protection IP 66 / IP 67 option (cable requirements: choose armored shielded cable, core: diagonal 2 * 2 * 0.75 or 1.5 * 2/2.5 * 2; wire diameter 8 mm - 12 mm) remote type: IP 65 sensor; IP 68 converter




WIRING TERMINALS

1. Integrated type: sensor and converter are integrated in structure.

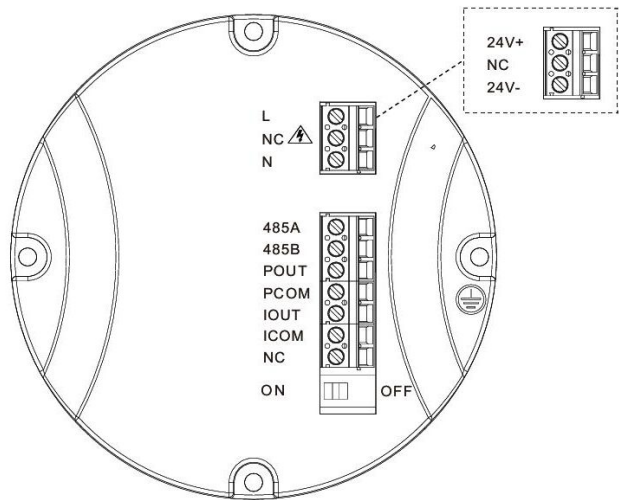

Terminal	Descripøon
L, N	220V AC power supply
24V+, 24V-	24V DC power supply
485A, 485B	RS-485 serial communicaøon
IOU, ICOM	(4..20) mA output
POU, PCOM	Pulse output
	Converter instrument protecøon grounding


2. Remote type: sensor and converter are installed separately and connected through signal cables.

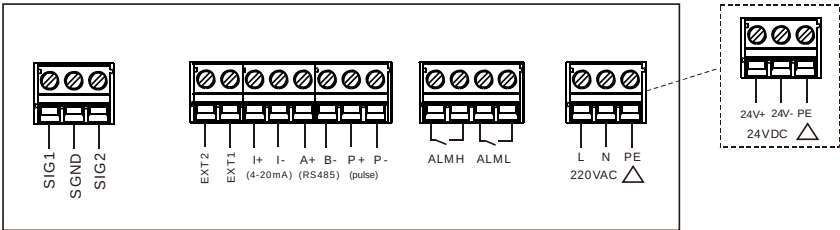

Terminal	Descripøon
SIG1, SIG2, SGND	Sensor signal
EXT1, EXT2	Excitaøon signal
I+, I-	(4..20) mA, output
A+, B-	RS-485 serial communicaøon
P+, P-	Pulse output
ALMH, ALML	Relay output (Opøonal)
L, N	220V AC power supply
24V+, 24V-	24V DC power supply
PE	Ground



DIMENSIONS

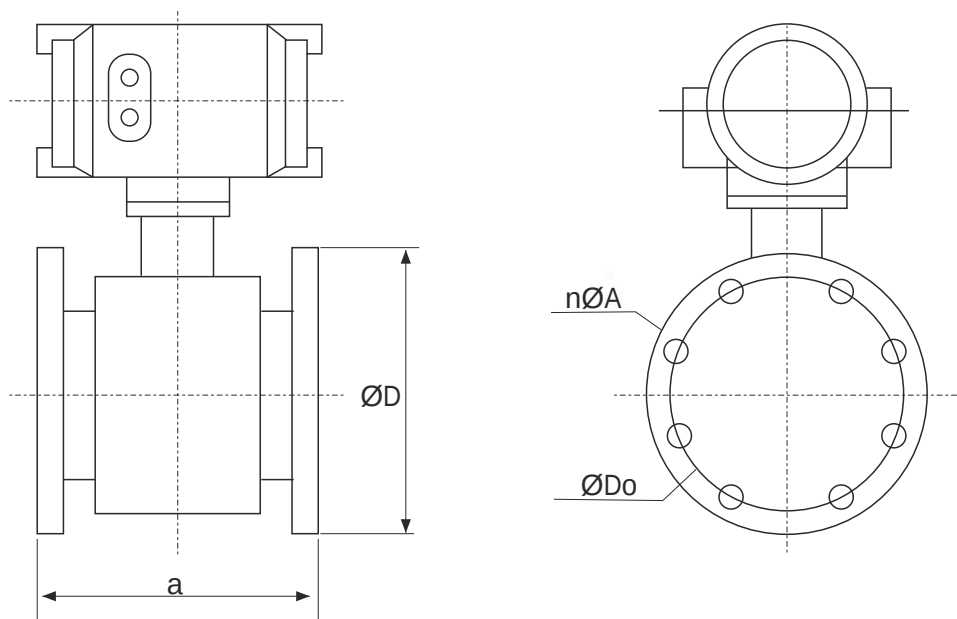

DN	a	D	Do	n*A	Pressure resistance
10	200	90	60	4*14	1.6 MPa
15	200	95	65	4*14	1.6 MPa
20	200	105	75	4*14	1.6 MPa
25	200	115	85	4*14	1.6 MPa
32	200	135	100	4*18	1.6 MPa
40	200	145	110	4*18	1.6 MPa
50	200	160	125	4*18	1.6 MPa
65	200	180	145	4*18	1.6 MPa
80	200	195	160	8*18	1.6 MPa
100	250	215	180	8*18	1.6 MPa
125	250	245	210	8*18	1.6 MPa
150	300	280	240	8*23	1.6 MPa
200	350	335	295	12*23	1.6 MPa
250	450	405	355	12*25	1.6 MPa
300	500	440	400	12*23	1.0 MPa
350	550	500	460	16*23	1.0 MPa
400	600	565	515	16*25	1.0 MPa
450	600	615	565	20*25	1.0 MPa
500	600	670	620	20*25	1.0 MPa
600	600	780	725	20*30	1.0 MPa
700	700	895	840	24*30	1.0 MPa
800	800	1015	950	24*33	1.0 MPa
900	900	1115	1050	28*33	1.0 MPa
1000	1000	1230	1160	28*36	1.0 MPa



ORDERING

SFX-800------------

Nominal diameter											
DN10 (3/8")	10										
DN15 (1/2")	15										
DN20 (3/4")	20										
DN25 (1")	25										
DN32 (1.25")	32										
DN40 (1.5")	40										
DN50 (2")	50										
DN65 (2.5")	65										
DN80 (3")	80										
DN100 (4")	1C										
DN125 (5")	1E										
DN150 (6")	1G										
DN200 (8")	2C										
DN250 (10")	2G										
DN300 (12")	3C										
DN350 (14")	3G										
DN400 (16")	4C										
DN450 (18")	4G										
DN500 (20")	5C										
DN600 (24")	6C										
DN700 (28")	7C										
DN800 (32")	8C										
DN900 (36")	9C										
DN1000 (40")	A0										
Process connection											
EN1092-1:2007 flange	L										
clamp	G										
ISO 2852 clamp	I										
ASME B16.5 flange	C										
JIS B2220 flange	S										
other	X										
Nominal pressure											
PN6	A										
PN10	B										
PN16	C										
PN25	D										
PN40	E										
PN63	F										
JIS 10K	J										
Class 150	G										
other	X										
Process connection material and body material											
carbon steel	MC										
304 stainless steel	M1										
other	XX										
Output and power supply											
4-20mA + pulse + RS-485, 220V AC	AA										
4-20mA + pulse + RS-485, 24V DC	AM										
4-20mA + HART + pulse + RS-485, 220V AC	AE										
4-20mA + HART + pulse + RS-485, 24V DC	AN										
4-20mA + pulse + RS-485 + SPST, 220V AC	AC										
4-20mA + pulse + RS-485 + SPST, 24V DC	AP										
4-20mA + HART + pulse + RS-485 + SPST, 220V AC	CE										
4-20mA + HART + pulse + RS-485 + SPST, 24V DC	CF										



Electrode material								
316L stainless steel	M3							
Hastelloy B	MF							
Hastelloy C	MG							
Ti	T1							
Ta	T2							
Platinum Iridium Alloy PT	MH							
WC	MJ							
Lining material								
PTFE	N6							
Chloroprene rubber (CR)	N1							
Polyurethane rubber (PU)	N2							
Teflon F46/FEP	N7							
Electrical interface, housing material and protection level								
Integrated type, M20×1.5 cable gland, aluminum alloy, IP65	WA							
Integrated type, M20×1.5 cable gland, aluminum alloy, IP66/67	W5							
Remote type, M20×1.5 cable gland, aluminum alloy, IP68	WC							
Cable length for the remote type								
0 m				00				
10 m				10				
15 m				15				
20 m				20				
25 m				25				
30 m				30				
other				XX				
Language								
English				2				
Russian				3				
Spanish				4				
Korean				5				
Other				X				
Additional certification								
None				0				
CCEP				C				
UL				U				
NSF				N				
Accessories								
Paired with Carbon Steel Flange							PB	
Paired with 304SS Flange							PC	
Paired with SS316L Grounding Ring							PE	