

CPA-P-305



- hydrostatic level transmitters
- slimline probe, diameter 19 mm for cramped areas
- nominal range: from 0...1 mH₂O up to 0...250 mH₂O
- output signal: 2-wire 4...20 mA
- stainless steel probe and sensor
- accuracy 0.35 % / 0.25 % span
- small thermal effect
- excellent long term stability and linearity
- certified for contact with drinking water by the Polish National Institute of Public Health (PZH) - EPDM/PUR version

The slimline probe CPA-P-305 with stainless steel sensor is designed for continuous level measurement in confined space conditions. Permissible media are clean or waste water and thin fluids.

A piezoresistive stainless steel sensor with low thermal error, an excellent linearity and a long term stability, is basis of CPA-P-305.

PREFERRED AREAS OF USE ARE



Water

level measurement in confined space conditions
ground water monitoring
depth or level measurement in wells and open waters
drinking water system
level measurement in container


TECHNICAL DATA

Input pressure range														
Nominal pressure gauge	[bar]	0.1	0.16	0.25	0.4	0.6	1	1.6	2.5	4	6	10	16	25
Level	[mH ₂ O]	1	1.6	2.5	4	6	10	16	25	40	60	100	160	250
Overpressure	[bar]	1	1	1	1	3	3	6	6	20	20	60	60	100
max. ambient pressure (housing)	40 bar													
Output signal / Supply														
Standard		2-wire: 4 ... 20 mA / V _S = 12 ... 36 V _{DC}												
Performance														
Accuracy		standard: nominal pressure > 0.4 bar: ≤ ± 0.35 % span nominal pressure ≤ 0.4 bar: ≤ ± 0.50 % span option: nominal pressure > 0.4 bar: ≤ ± 0.25 % span												
Permissible load		R _{max} = [(V _S – V _{S min}) / 0,02 A] W												
Influence effects		supply: 0.05 % span / 10 V load: 0.05 % span / kW												
Long term stability		≤ ± 0.1 % span / year												
Response time		< 10 msec												
¹ accuracy according to EN IEC 62828-2 – limit point adjustment (non-linearity, hysteresis, repeatability)														
Thermal effects (Offset and Span)														
Nominal pressure P _N		[bar]	≤ 0.1		≤ 0.25		≤ 0.4		≤ 1		> 1			
Tolerance band		[% span]	≤ ± 2		≤ ± 1.5		≤ ± 1		≤ ± 1		≤ ± 0.75			
TC, average		[% span / 10 K]	± 0.3		± 0.2		± 0.14		± 0.1		± 0.07			
in compensated range		[°C]	0 ... 50							0 ... 70				
Permissible temperatures														
Permissible temperatures		Medium/ electronics/ environment/ storage: -20 ... 80 °C *												
[*] If the cable is intended for use in a smaller temperature range, the use of the probe is limited by this range.														




Electrical protection ²		
Short-circuit protection	permanent	
Reverse polarity protection	no damage, but also no function	
Electromagnetic compatibility	emission and immunity according to EN 61326	
Integrated overvoltage protection (ground wire) in accordance with CSN EN 61000-4-5 (1 kV) ³		
² additional external overvoltage protection unit in terminal box KL 1 or KL 2 with atmospheric pressure reference available on request		
³ version with the output signal 4 ... 20 mA / 2-wire		
Electrical connection		
Cable with sheath material ⁴	PVC (-5 ... 70 °C) grey (-25 ... 70 °C in fixed condition) PUR (-25 ... 80 °C) black (with drinking water certificate) FEP ⁵ (-25 ... 75 °C) black	Ø 7,4 mm Ø 7,4 mm Ø 7,4 mm
Cable capacitance	signal line/shield also signal line/signal line: 160 pF/m	
Cable inductance	signal line/shield also signal line/signal line: 1 µH/m	
Bending radius	static installation: 10-fold cable diameter dynamic application: 20-fold cable diameter	
⁴ cable with integrated air tube for atmospheric pressure reference		
⁵ do not use freely suspended probes with an FEP cable if effects due to highly charging processes are expected		
Materials (media wetted)		
Housing	stainless steel 1.4404 (316L)	
Seals	FKM / EPDM (with drinking water certificate)	
Diaphragm	stainless steel 1.4435 (316L)	
Protection cap	POM-C	
Cable sheath	PVC / PUR (with drinking water certificate) / FEP	
Miscellaneous		
Drinking water certificate ⁶	according to Polish National Institute of Public Health (PZH) (with order please indicate if her device must be certificated for drinking water.)	
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 µH/m	
Current consumption	signal output current: max. 25 mA	
Weight	approx. 100 g (without cable)	
Ingress protection	IP 68	
CE-conformity	EMC Directive: 2014/30/EU	
⁶ only possible with EPDM seal in combination with PUR cable		

ELECTRICAL CONNECTION

Wiring diagram		
2-wire-system (current)		
		
Pin configuration		
Electrical connection	cable colours (DIN 47100)	
Supply +	wh (white)	
Supply -	bn (brown)	
Shield	gn/ye (green / yellow)	



DIMENSION DRAWINGS

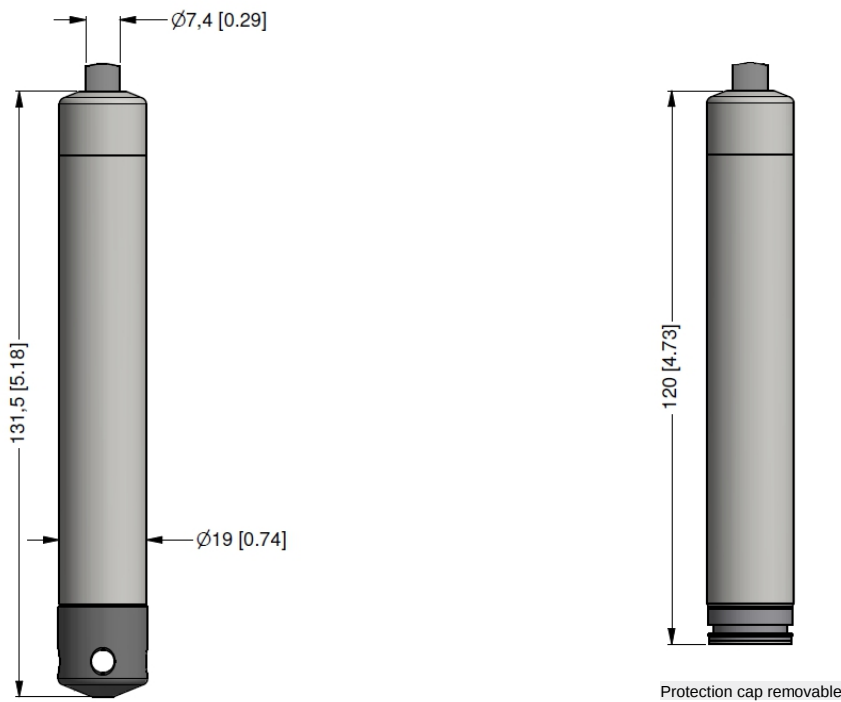

ACCESSORIES

Mounting flange with cable gland		
Technical data		
Suitable for	all probes	
Flange material	stainless steel 1.4404 (316L)	
Material of cable gland	standard: brass, nickel plated on request: stainless steel 1.4305 (303); plastic	
Seal insert	material: TPE (ingress protection IP 68)	
Hole pattern	according to DIN 2507	
Version	Size (in mm)	Weight
DN25 / PN40	D = 115, k = 85, b = 18, n = 4, d= 14	1.4 kg
DN50 / PN40	D = 165, k = 125, b = 20, n = 4, d= 18	3.2 kg
DN80 / PN16	D = 200, k = 160, b = 20, n = 8, d= 18	4.8 kg
Ordering type		Ordering code
DN25 / PN40 with cable gland brass, nickel plated		ZMF2540
DN50 / PN40 with cable gland brass, nickel plated		ZMF5040
DN80 / PN16 with cable gland brass, nickel plated		ZMF8016
Cable clamp		
Technical Data		
Suitable for	all probes with cable $\bar{C}$ 5.5 ... 10.5 mm	
Material	standard: steel, zinc plated optionally: stainless steel 1.4301 (304)	
Weight	approx. 160 g	
Ordering type		Ordering code
Terminal clamp, of steel, zinc plated		1003440
Terminal clamp, of stainless steel 1.4301 (304)		1000278

cable gland M16x1.5 with seal insert (for cable- $\bar{C}$ 4 ... 11 mm)



ORDER CODE _____

2 - shielded cable with integrated ventilation tube for atmospheric pressure reference

